




ET Large HD Heavy Duty Folding Pool

The pool is primarily designed as a mobile environmental protection device especially suitable for quick response to accidents wherever the environment is threatened by leaks of hazardous substances into soil and/or water. It is suitable as prevention during cleaning of heavy military vehicles and fire-fighting equipment and high-load vehicles. It was designed to resist to extreme pressure, eg. during decontamination or washing of tracked vehicles (army tanks...).



- ▶ Extreme resistance
- ▶ Simple and quick unfolding
- ▶ Easy to drive in
- ▶ The unique patented design
- ▶ Protective pad and under-wheel tracks are standard accessories
- ▶ Production of other dimensions is available according to individual customer's requirements

Extremely resistant pool suitable for washing and decontamination of heavy machinery

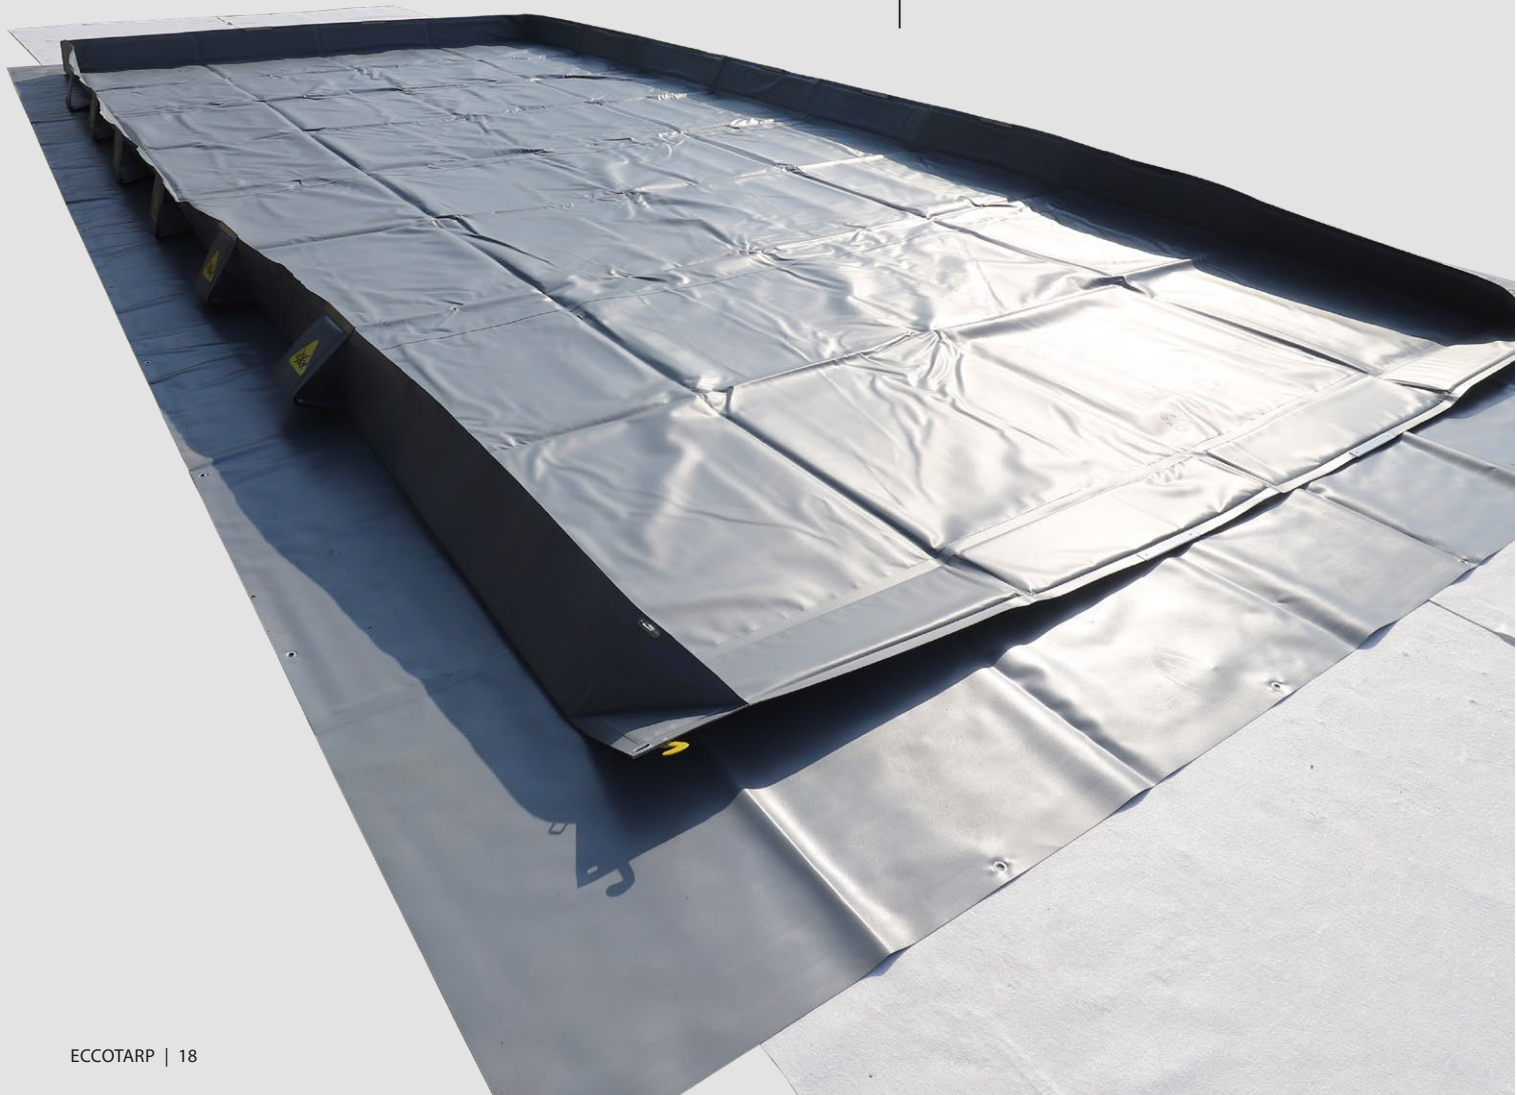



Pool with wooden ramps



Detail of anchorage of a wooden ramp



Detail of lateral reinforcements

Examples of uses




Detail of tracked vehicle entering the wooden ramp

Technical details

Unlike standardly produced spill bunds this pool is made of extremely resistant materials which are resistant to the effects of industrial fluids, chemicals, hydraulic lubricants and all oil and oil-based products such as fuel oil, diesel fuel, gasoline, etc. (see Chemical resistance certificate in the relevant chapter at the end of catalogue). It is usable at temperatures from -30 °C to +70 °C. The pool is standardly supplied with two pairs of under-wheel tracks (bottom and inner), nonwoven protective pad and protective pad made of strong PVC. These accessories considerably enhance the durability of the product. When using the pool for washing of tracked vehicles, it is also necessary to use wooden ramps that are not a standard part of the package. The unique patented design of the lateral reinforcements enables optional adjustment of the pool size to be made. The pool was put to weight tests.

The product is protected by registered utility model (technical patent) no. 22118 lodged with the Industrial Property Office.



Type	Dimensions (mm)	Volume (l)	Dimensions when folded up (mm)	Weight (kg)
HD Heavy Duty	8000 × 4000 × 250	8000	1300 × 1500 × 650	97
Accessories				
Nonwoven protective pad	9000 × 5000			
Protective pad made of strong PVC	9000 × 5000			33
Under-wheel tracks 4 pcs	12000 × 600/pc			26/pc
Wooden ramp – 16 pcs of wooden blocks	12000 × 400/ramp		3 × (1950 × 800 × 750)	474/ramp
Middle part of wooden ramp 1 pc	1950 × 400 × 250			55
Skewed part of wooden ramp 1 pc	1200 × 400 × 250			36
Connection clamp for wooden ramp – total 28 pcs	215 × 145 × 35/pc			0,9/pc

Specifications