



Collapsible containment tank

The self-supporting containment tank is designed to be used as a utility water reservoir or a collection tank for hazardous substances. The tank is suitable for pumping liquids from accidental spillages or as a backup water reservoir at difficult to reach areas.




- Rapid assembly
- Light weight
- Variants Octagon and Hexagon
- Side handles for easy manipulation
- Perimeter belt for better strengthening of sides
- Possibility of adding of drain hole and ball valve
- Volumes of 1000–3000 litres



Backup water reservoir at difficult to reach areas



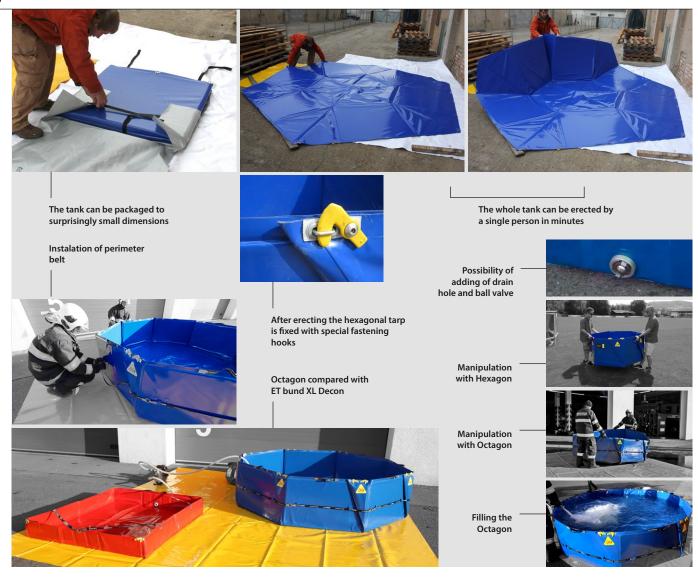

Technical details

The tanks are made of highly resistant PES/PVC coated material with textile reinforcement. The material is resistant against chemical and oil substances (see Chemical resistance certificate in the relevant chapter at the end of catalogue), thereby providing enhanced potential of use in environmental accidents. The sidewalls have 6 mm thick polypropylene reinforcements welded inside. The temperature range of use is from -30 °C to +70 °C.

It is necessary for the tank to be placed on an even surface, without any sharp object. It is recommended to place the tank on a protective pad to increase its lifetime.

The product is protected by registered utility model (technical patent) no. 22118 lodged with the Industrial Property Office.

2000	
2000	3000
1732/2000	2300/2650
800	670
1000	960
50	55
0 1050 × 850 × 150	1070 × 805 × 130
yes	yes
	800 1000 50 1050×850×150 yes yes yes yes